
USERS MUST ASSURE THEY ARE USING THE CORRECT REVISION.

REVISIONS								
REV	ECO NO.	DESCRIPTION	BY	DATE	APP'D BY	DATE		
1		ORIGINAL RELEASE	K. KOONS	12/20/2017				

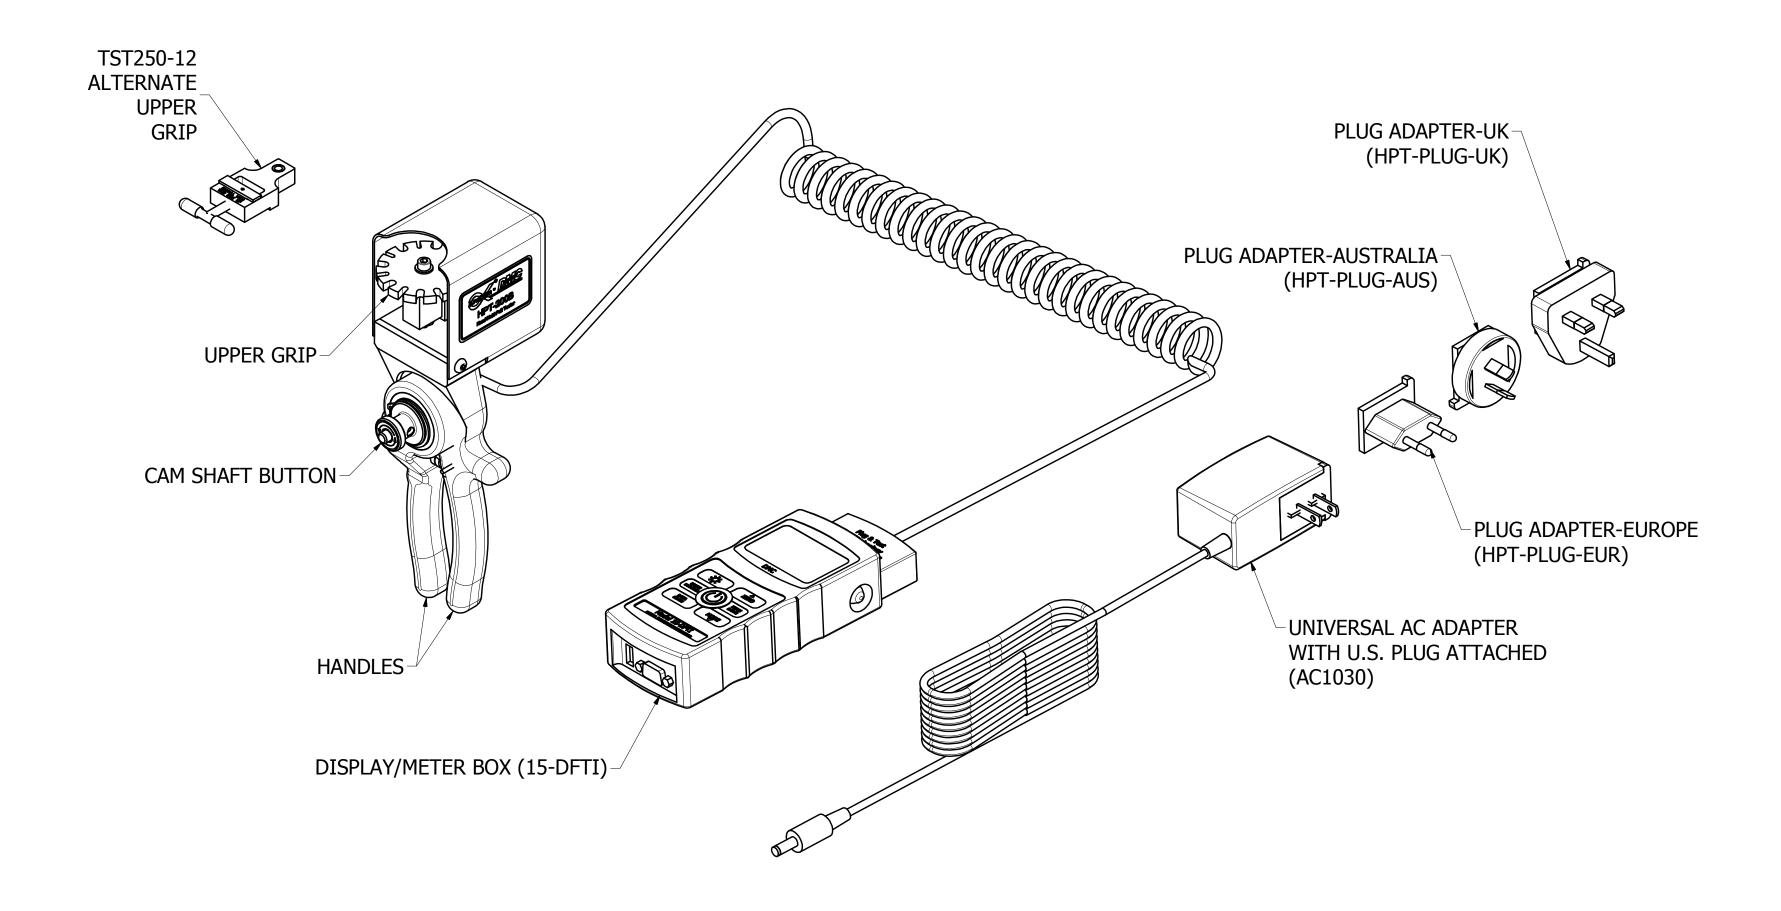

SPECIFICATION	DESCRIPTION					
ACCURACY	±0.5% OF FULL SCALE (2-200lb)					
SAMPLING RATE	7 Khz					
POWER	AC OR RECHARAGEABLE BATTERY					
BATTERY LIFE	BACKLIGHT ON: UP TO 7 HOURS					
DATTERT LIFE	BACKLIGHT OFF: UP TO 24 HOURS					
OUTPUTS	USB / RS232: FULLY CONFIGURABLE					
OUTPUTS	UP TO 115,200 BAUD					
WEIGHT	0.7 lb [0.3 KG]					
ENVIRONMENTAL	40 - 100° F MAX 93% HUMIDITY,					
CONDITIONS	NON CONDENSING					
WARRANTY	90 DAYS					

UNCONTROLLED DOCUMENT WILL NOT BE UPDATED

DIMENSIONS IN INCHES - UNLESS OTHERWISE SPECIFIED

CIL	IED									
				ITEM PART		ART NO.	QTY.		DESCRIPTION / REMARKS	
		NA		CHK'D.	ENF RRR	DATE 5/26/2016 DATE 5/26/2016			DANIELS MANUFACTURI ORLANDO, FLORIDA CAGE 11851	NG CORP.
	RESTRICTED & CONFIDENTIAL CONFIDENTIAL PROPERTY OF DANIELS MANUFACTURING CORP. NOT TO BE DISCLOSED TO OTHERS. REPRODUCTION OR USED FOR ANY OTHER PURPOSE EXCEPT AS AUTHORIZED IN WRITING BY DANIELS MANUFACTURING. MUST BE RETURNED TO DANIELS MANUFACTURING CORP. ON COMPLETION OF ORDER OR PURPOSES FOR WHICH LENT.	HEAT TREAT	NA			TITLE WHERE U	Е	ABLE TENSILE TES NVELOPE DRAWING		
	CREATED FROM AN INVENTOR MODEL. CHANGES MUST BE REFLECTED IN THE 3D PART	FINISH NA		INDICATED. ACTUAL DMC PART NUMBER IS CAD PART NUMBER WITHOUT THE "-ENV" SUFFIX			SIZE	1 / 2	HPT-200B-ENV DWG. NO.	SHEET 1 OF 1 REV.
	DO NOT SCALE DRAWING			= - 7		HPT-200B			1	