


TE CONNECTIVITY	COLOR CODE	12	14	16	18	20	22	24	WIRE SIZE
0462-203-12xx 0460-204-12xx	BLUE	8	7						SE
0462-201-16xx 0460-202-16xx	RED			6	5				LECT
0462-201-20xx 0460-202-20xx	BLACK					4	3	2	OR

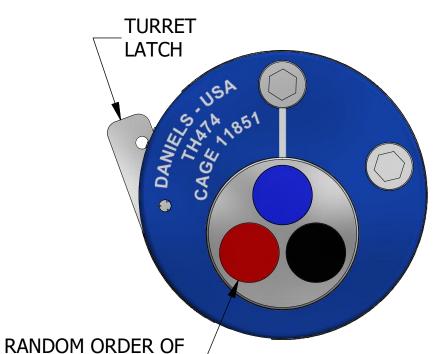

2.00 MAX

1.38

1.38

1.38

1.38

1.38

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.50

1.

INSERT COLOR	HOLE DIMENSIONS	ADDITIONAL FEATURES					
BLUE	Ø.169 ⊽THRU	∟JØ.196 ▼.080					
RED	Ø120 ⊽THRU	∟∟Ø.136 ⊽.049					
BLACK	Ø.045 ▼.530	∟JØ.080 ⊽.458	∟JØ.110 ▼.020				

ROTATION IS ACCEPTABLE FOR POSITIONER INSERTS MATERIAL PART NO. QTY. **DESCRIPTION / REMARKS** A. MOO-YOUNG 9/12/1998 CHK'D. DANIELS MANUFACTURING CORP.
ORLANDO, FLORIDA N/A CAGE 11851 HEAT TREAT **RESTRICTED & CONFIDENTIAL** NOTE: **TURRET HEAD** CONFIDENTIAL PROPERTY OF DANIELS MANUFACTURING CORP. NOT TO BE DISCLOSED TO OTHERS. REPRODUCTION OR USED FOR ANY OTHER PURPOSE EXCEPT AS AUTHORIZED IN THIS DRAWING IS AN OUTLINE **ENVELOPE DRAWING** N/A WRITING BY DANIELS MANUFACTURING. MUST BE RETURNED TO DANIELS MANUFACTURING DRAWING OF THE RESPECTIVE CORP. ON COMPLETION OF ORDER OR PURPOSES FOR WHICH LENT. DMC PART NUMBER WHERE USED: AF8 INDICATED. ACTUAL DMC FINISH SIZE SCALE CREATED FROM AN INVENTOR MODEL. PART NUMBER IS CAD PART TH474-ENV 1 OF 1 NUMBER WITHOUT CHANGES MUST BE REFLECTED IN THE 3D PART N/A THE "-ENV" SUFFIX В 2:1 3 DO NOT SCALE DRAWING TH474